



PACKING	INNER	MASTER
/	pcs	pcs
Colour Box	4	12



TECHNICAL DATA

Power supply	220V AC
Power supply provided	YES
Type of power supply provided	POWER CABLE
Lighting source	GU10 BULB
Lighting power (W)	Max 28
Light beam	FOCUS
Lamp included	(NOT INCLUDED)
Attachment	GU10
Maximum connections	UP TO 60 SPOTS (SERIAL)
Switch	NO
Operating temperature (°C)	-20°C / +45°C
Maximum weight supported (kg)	500.000
IP Protection	IP67
Insulation class	I
Country of origin	CHINA
Material	METAL
Warranty	2 YEARS
Width (mm)	100
Depth (mm)	100
Height (mm)	95
Net weight (Kg)	0.270

DESCRIPTION

Sturdy round recessed spotlight for GU10 bulbs. The stable frame is made of stainless steel (INOX 316) and shatterproof glass. Resistant to UV rays, impacts, dirt, and waterproof (IP64), it is rustproof and corrosion-resistant, and can hold up to 1000 kg. Load capacity up to 1,000 kg (based on a concrete construction) – IP64 protection – Dustproof and splashproof installation – Protection against impacts and water. Ambient temperature: -20°C / + 50°C. Material: 316 stainless steel and safety glass cover – Rigid plastic flush-mount box. Cable: 25 cm. Dimensions – Cover Ø 100 mm, Recessed depth 140 mm, Recessed diameter ø 93 mm, Height 3 mm – Direct connection to 230 V/50Hz without additional transformer. Hole: diameter 90 mm. Note: The product ships with a GU10 socket but without a bulb. You can use a GU10 LED bulb of your choice (max. 10W).

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	100
Pack width (mm)	110
Pack height (mm)	120
Packed product weight (kg)	0.344


LOGISTICS DATA

Inner width (cm)	25
Inner length (cm)	23
Inner height (cm)	14
Quantity in inner	4
Gross weight inner (kg)	1.500
ITF INNER	18003910108223
Master length (cm)	26
Master width (cm)	25
Master height (cm)	45
Quantity in master	12
Master gross weight (kg)	4.700
ITF MASTER	28003910108220
How many pieces on 80x120 pallet (pz)	432
INTRASTAT Code	94054210
DEEE	0.06
ECOLOGIC SCALES 2025	MLUMI020000
Country of origin	CHINA



BULB NOT INCLUDED

max. 54 mm

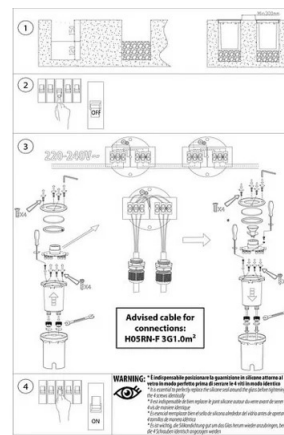

FORI CON PRESSACAVO PER COLLEGAMENTO IN SERIE
HOLES WITH CABLE GLAND FOR SERIAL CONNECTION

