



**20W**  
**4000K**  
COOL WHITE



PACKING	INNER	MASTER
/	pcs	pcs
<b>Colour Box</b>	<b>10</b>	<b>40</b>



## TECHNICAL DATA


Power supply	220V AC
Power supply provided	YES
Type of power supply provided	INTERNAL DRIVER
Lighting source	2835 SMD LED
Lighting power (W)	20
Electricity consumption (W)	20
Lumen	1600
IRC	>80
Light beam	DIFFUSE
Beam angle (°)	120°
LED lifespan (hours)	25.000
Material	ALUMINIUM
Number of on-off cycles	15000
Power cord length (cm)	15
Cable section	H05VV-F 3G1.0mm2
Switch	NO
Accessories included	Cable 15 cm VDE
IP Protection	IP65
Insulation class	I
Energy class	F
Light colour	4000K
Dimmability	NOT DIMMABLE
Lamp included	(INCLUDED)
Code eprel	691964
Link db eprel	<a href="http://eprel.ec.europa.eu/qr/691964">http://eprel.ec.europa.eu/qr/691964</a>
Warranty	2 YEARS
Width (mm)	140
Depth (mm)	100
Height (mm)	45
Net weight (Kg)	0.260
Eprel card	<a href="https://eprel.ec.europa.eu/fiches/lightsources/Fiche_691964_EN.pdf">https://eprel.ec.europa.eu/fiches/lightsources/Fiche_691964_EN.pdf</a>

## DESCRIPTION




**High Brightness:** The use of high-quality, highly efficient SMD 2835 LEDs makes this headlight particularly bright and long-lasting. 1600 lumens and 20W: It can replace a traditional 150W incandescent bulb, saving over 85% on your electricity bill. **IP65 Waterproof:** Made of die-cast aluminum and tempered glass, the floodlight is IP65 waterproof, rust-resistant and surface treated with high-quality electrostatic material, can be widely used in indoor and outdoor lighting projects. **Perfect Design:** Aluminum body with tempered glass diffuser for excellent light transmission. High-quality aluminum makes the lamp more durable. The nanometer material reflector is safe and durable. Furthermore, the diffusion is 1.4 times higher than traditional LED headlights. **Good Heat Dissipation:** Ultra-thin design and the use of high self-heating 2835 LEDs ensure the best heat dissipation performance, the headlight can quickly lower the temperature and thus ensure the long life of the headlight and safety in use. **Versatile:** With a 360-degree adjustable angle, it can be installed on the ceiling, wall, or floor. After installation, the projection surface can be adjusted to any angle. Suitable for outdoor use such as gardens, courtyards, plazas, and piers.

## LOGISTICS DATA

<b>Packing type</b>	Colour Box
<b>Pack length (mm)</b>	50
<b>Pack width (mm)</b>	140
<b>Pack height (mm)</b>	90
<b>Packed product weight (kg)</b>	13.200
<b>Inner width (cm)</b>	30
<b>Inner length (cm)</b>	28
<b>Inner height (cm)</b>	19
<b>Quantity in inner</b>	10
<b>Gross weight inner (kg)</b>	3.200
<b>ITF INNER</b>	18003910106922
<b>Master length (cm)</b>	29
<b>Master width (cm)</b>	30
<b>Master height (cm)</b>	39
<b>Quantity in master</b>	40
<b>Master gross weight (kg)</b>	13.200
<b>ITF MASTER</b>	28003910106929
<b>How many pieces on 80x120 pallet (pz)</b>	1280
<b>INTRASTAT Code</b>	94054110
<b>DEEE</b>	0.06
<b>ECOLOGIC SCALES 2025</b>	MLUMI020000
<b>Country of origin</b>	CHINA

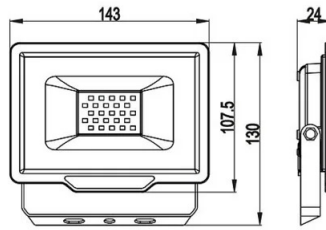

**advanced radiator, safe to use**  
25000 hours of service life

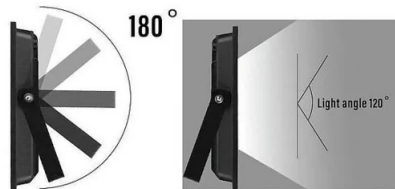

**ENERGY**

VELAMP  
IS745-5-4000K

A	Green arrow pointing right
B	Green arrow pointing right
C	Yellow-green arrow pointing right
D	Yellow arrow pointing right
E	Orange arrow pointing right
F	Red arrow pointing right
G	Red arrow pointing right

**F**

20  
kWh/1000h

2019/7/2015