



PACKING	INNER	MASTER
/	pcs	pcs
	4	4




TECHNICAL DATA

Power supply	220V AC
Power supply provided	YES
Type of power supply provided	POWER CABLE
Lighting source	2835 SMD LED
Electricity consumption (W)	100
IRC	>80
Light beam	DIFFUSE
Beam angle (°)	120°
Material	ALUMINIUM
Power cord length (cm)	300
Cable section	H05RN-F3G1.0mm2
Color	BLACK
Switch	NO
Functions	ON / OFF
IP Protection	IP65
Insulation class	I
Dimmability	NOT DIMMABLE
Lamp included	BULB INCLUDED
Product container (energy class)	F
Container product (registered form code)	IS745-5-4000K
Link db eprel	http://eprel.ec.europa.eu/qr/691964
Warranty	2 YEARS
Width (mm)	140
Depth (mm)	140
Height (mm)	670
Net weight (Kg)	2.841

DESCRIPTION

Powerful: the energy-saving 2x20W / 2x1600 lumen LED work light illuminates with natural white light (4000K) and makes working conditions optimal, even in outdoor environments (IP65); average lifespan of 25,000 hours with low consumption. **Practically everywhere:** the portable lamp is useful for work outside, on the construction site, in the workshop, in the garden, camping or in the garage; the headlights are also waterproof and are suitable for both internal and external use. **Easy to use:** extendable and easily adjustable metal tripod; wide base for better stability. Maximum extension: 173cm. **Simple:** the LED work light is equipped with a long 3 meter neoprene power cable (H05RN-F 3G1.0mm²), which can be connected to any European socket (Schuko socket). Light beam: 120° (floodlight); Suitable for: barbecues, photo sets, party lighting, construction site lighting, garage lighting, etc.

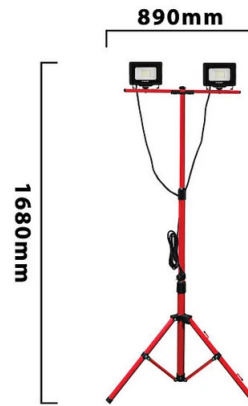

ADVANCED RADIATOR, SAFE TO USE
25000 HOURS OF SERVICE LIFE



SCHUKO
220/240V
50W

3m

