



PACKING	INNER	MASTER
/	pcs	pcs
Colour Box	6	24



TECHNICAL DATA


Power supply	220V AC
Power supply provided	YES
Type of power supply provided	INTERNAL DRIVER
Lighting source	2835 SMD LED
Lighting power (W)	20
Electricity consumption (W)	20
Lumen	1600
IRC	>80
Light beam	DIFFUSE
Beam angle (°)	100°
Detection angle (°)	120°
Detector operation time	10 SEC TO 8 MN
LED lifespan (hours)	25.000
Material	ALUMINIUM
Number of on-off cycles	15000
Power cord length (cm)	15
Cable section	H05VV-F 3G1.0mm2
Switch	NO
Accessories included	Cable 15 cm VDE
IP Protection	IP44
Insulation class	I
Energy class	F
Light colour	4000K
Dimmability	NOT DIMMABLE
Lamp included	(INCLUDED)
Energy Label	https://www.velamp.com/energylabels2021/IS748-5-4000K.jpg
Code eprel	691971
Link db eprel	http://eprel.ec.europa.eu/qr/691971
Warranty	2 YEARS
Width (mm)	140
Depth (mm)	60
Height (mm)	120
Net weight (Kg)	0.315
Eprel card	https://eprel.ec.europa.eu/fiches/lightsources/Fiche_691971_EN.pdf

DESCRIPTION





Detection Function: Equipped with a PIR motion sensor (passive infrared sensor), this floodlight has powerful infrared human body detection, instant on, convenient, and energy-saving. Detection distance, angle, timing, and brightness can be manually set and adjusted. High Brightness: The use of high-quality, highly efficient SMD 2835 LEDs makes this headlight particularly bright and long-lasting. 1600 lumens of light and 20W: It can replace a traditional 150W incandescent bulb, saving over 85% on your electricity bill. IP44 Waterproof: Made of die-cast aluminum and tempered glass, the floodlight is IP44 waterproof, rust-resistant and surface-treated with high-quality electrostatic material, can be widely used in indoor and outdoor lighting projects. Perfect Design: Aluminum body with tempered glass diffuser for excellent light transmission. High-quality aluminum makes the lamp more durable. The nanometer material reflector is safe and durable. Furthermore, the diffusion is 1.4 times higher than traditional LED headlights. Good Heat Dissipation: Ultra-thin design and the use of high self-heating 2835 LEDs ensure the best heat dissipation performance, the headlight can quickly lower the temperature and thus ensure the long life of the headlight and safety in use.

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	80
Pack width (mm)	140
Pack height (mm)	150
Packed product weight (kg)	9.650
Inner width (cm)	32
Inner length (cm)	26
Inner height (cm)	31
Quantity in inner	6
Gross weight inner (kg)	2.500
ITF INNER	18003910106960
Master length (cm)	53
Master width (cm)	32
Master height (cm)	32
Quantity in master	24
Master gross weight (kg)	9.650
ITF MASTER	28003910106967
How many pieces on 80x120 pallet (pz)	480
INTRASTAT Code	94054110
DEEE	0.06
ECOLOGIC SCALES 2025	MLUMI020000
Country of origin	CHINA

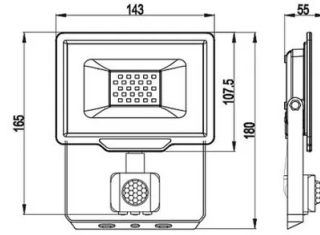

advanced radiator, safe to use
25000 hours of service life

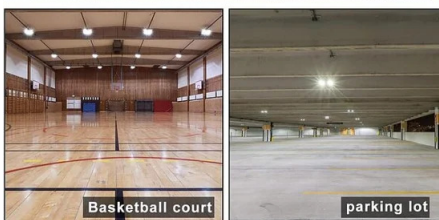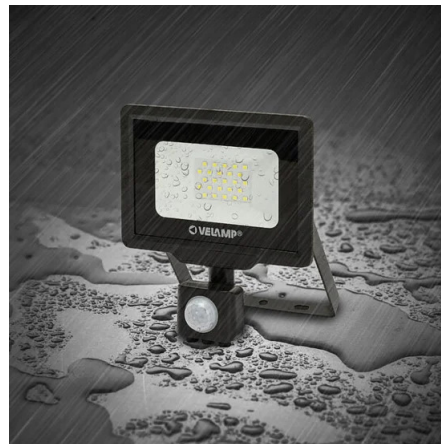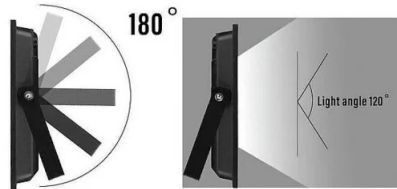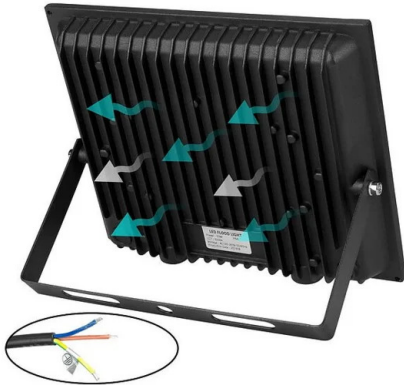

ENERGY

VELAMP
IS748-5-4000K

A	Green arrow pointing right
B	Green arrow pointing right
C	Yellow-green arrow pointing right
D	Yellow arrow pointing right
E	Orange arrow pointing right
F	Red arrow pointing right
G	Dark red arrow pointing right

F

20 kWh/1000h

2019/2015
5102/6102

