




- LED 2835 SMD
- 50W**
- 220-240V-50/60Hz
- DIFFUSE 110°
- IP65
- 2m CABLE
H05RN-F 3G1.0mm²



PACKING	INNER	MASTER
/	pcs	pcs
Colour box	8	8

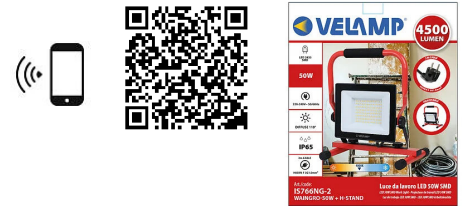

TECHNICAL DATA

Name	WAINGROW 50W + H-STAND
Power supply	220V AC
Power supply provided	YES
Type of power supply provided	INTERNAL DRIVER
Lighting source	2835 SMD LED
Lighting power (W)	50
Electricity consumption (W)	50
Lumen	4500
IRC	70
Light colour	4000K
Light beam	DIFFUSE
LED lifespan (hours)	25000
Power cord length (cm)	200
Cable section	H05RN-F3G1.0
Cable length (meters)	2
Switch	NO
Functions	ON / OFF
Plug	Type E / F - 2 pin (EU Hybrid)
IP Protection	IP65
Insulation class	I
Dimmability	NO
Color	RED
Material	ALUMINIUM
EPREL code form	2528923
Container product (registered form code)	12006662
Product container (energy class)	E
Eprel PDF file	https://storage.onpage.it/8ca2be4af936e5c6116afdaedf0252e7a7b16020/Fiche_2528923_EN.pdf
Link db eprel	https://eprel.ec.europa.eu/qr/2528923
Warranty	2 YEARS
Width (mm)	280
Depth (mm)	240
Height (mm)	70
Net weight (Kg)	1.240

DESCRIPTION

Power: The energy-saving 50W/4500 lumen LED spotlight illuminates the construction site with natural white light (4000K) and provides optimal working conditions, even outdoors (IP65); average lifespan of 25,000 hours. The spotlight contains a non-replaceable energy class E light source.

Practically anywhere: The portable lamp is useful for outdoor work, on the construction site, in the workshop, in the garden, at the campsite, or in the garage. The light is also waterproof and suitable for both indoor and outdoor use. Easy to use: Swivel metal bracket with padded handle makes it easy to move the work light around the jobsite; wide base for better stability; and lightweight. Simple: the construction site lamp is equipped with a long 2-metre neoprene power cable (H05RN-F 3G1.0mm²), which can be connected to any European socket (Schuko socket). The spotlight contains a non-replaceable light source of energy class E.

LOGISTICS DATA

Packing type	Colour box
Pack length (mm)	250
Pack width (mm)	305
Pack height (mm)	80
Packed product weight (kg)	1.358
Inner length (cm)	67
Inner height (cm)	33
Quantity in inner	8
Gross weight inner (kg)	11.600
ITF INNER	18003910140513
Quantity in master	8
How many pieces on 80x120 pallet (pz)	128
INTRASTAT Code	94054210
DEEE	0.25



