



PACKING ☐ / ☑	INNER ☐ pcs	MASTER ☐ pcs
Colour Box	4	4



200W
6500K COLD LIGHT
6500K
CE
IP65
NOT DIMMABLE
6500K
TÜV
TUV Rheinland Group
CLASSE I
F

TECHNICAL DATA


Power supply	220V AC
Power supply provided	YES
Type of power supply provided	INTERNAL DRIVER
Lighting source	2835 SMD LED
Lighting power (W)	200
Electricity consumption (W)	200
Lumen	17000
IRC	>80
Light beam	DIFFUSE
Beam angle (°)	120°
LED lifespan (hours)	25.000
Material	ALUMINIUM
Power cord length (cm)	30
Cable section	H05VV-F 3G1.0mm2
Switch	NO
Accessories included	Cable 15 cm VDE
IP Protection	IP65
Insulation class	I
Energy class	F
Light colour	6500K
Dimmability	NOT DIMMABLE
Lamp included	(INCLUDED)
Energy Label	https://www.velamp.com/energylabels2021/IS786.jpg
Code eprel	676855
Link db eprel	http://eprel.ec.europa.eu/qr/676855
Warranty	2 YEARS
Width (mm)	362
Depth (mm)	304
Height (mm)	59
Net weight (Kg)	4.534
Eprel card	https://eprel.ec.europa.eu/fiches/lightsources/Fiche_676855_EN.pdf

DESCRIPTION




Ultra-high brightness: The use of high-quality SMD LEDs ensures high luminous efficiency (15,000 real lumens), long life, excellent heat dissipation performance; lifespan: 20,000 hours; DOB driver: to provide more compact dimensions than traditional spotlights. Waterproof and durable: IP65 waterproof, suitable for both indoor and outdoor use; the use of ultra-resistant materials such as tempered glass and high-quality die-cast aluminum makes the lamp particularly resistant to shocks and atmospheric agents. Ideal for illuminating a warehouse, garage, outdoor area like the garden or driveway; wherever you need it; the 120° diffused beam makes it a perfect lighting tool even for walls and facades. Ultra-low energy consumption: The outdoor LED floodlight saves you up to 80% electricity compared to ordinary lights, directly reducing your electricity bills. Cold light 6500K; non-dimmable; class I; 30cm connection cable.

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	355
Pack width (mm)	415
Pack height (mm)	110
Packed product weight (kg)	10.300
Inner width (cm)	23
Quantity in inner	4
ITF INNER	18003910104591
Master length (cm)	43
Master width (cm)	23
Master height (cm)	38
Quantity in master	4
Master gross weight (kg)	10.300
How many pieces on 80x120 pallet (pz)	192
INTRASTAT Code	94054110
DEEE	0.71
ECOLOGIC SCALES 2025	MLUMI030000
Country of origin	CHINA



advanced radiator, safe to use
25000 hours of service life

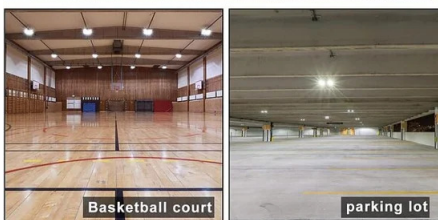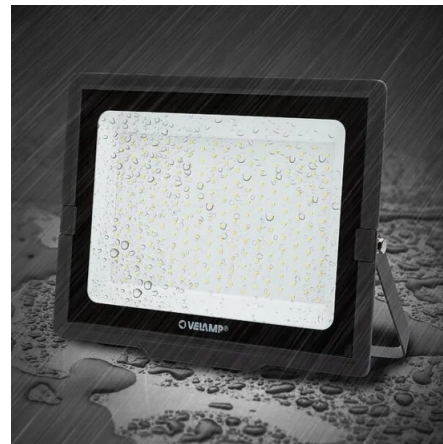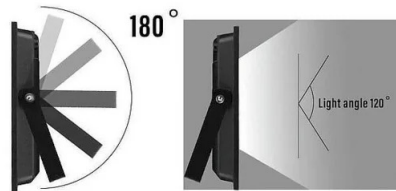

VELAMP IS786	
A	
B	
C	
D	
E	
F	
G	
200 kWh/1000h	

