



PACKING	INNER	MASTER
/	pcs	pcs
Colour box	1	6



TECHNICAL DATA


Name	PR190
Power supply	220V AC
Power supply provided	YES
Type of power supply provided	POWER CABLE
Electricity consumption (W)	2000
Power cord length (cm)	140
Cable section	H05VV-F 2X1.0
Switch	YES
Functions	HOT + FAN
Absorption (A)	8.3
Plug	CEE 7/17
Power adjustment (W)	1000W/2000W
Timer	NO
Fuse required	YES
Auto reset thermostat	YES
Volume of hot air generated (m³h)	58
Heating area (m²)	20
Operating temperature (°C)	-10°C + 50°C
IP Protection	IP22
Insulation class	II
Color	WHITE
Country of origin	CHINA
Material	PLASTIC - OTHER
Warranty	2 YEARS
Width (mm)	500
Depth (mm)	105
Height (mm)	170
Net weight (Kg)	1.844

DESCRIPTION

2000W wall-mounted ceramic fan heater. Equipped with a digital display, remote control, and 24-hour and weekly timer. Adjustable thermostat with 2 power levels: minimum power 1000W and maximum power 2000W. It also has a fan function, making it convenient even in the summer! It features IPX2 splash protection, making it ideal for use in bathrooms. Designed with Ceramic Technology (PTC), which offers greater efficiency and safety thanks to its ability to automatically adjust output power based on temperature increases. Furthermore, heat is quickly distributed to the desired point. Capable of efficiently heating 20 m2. SAFETY: This heater is equipped with overheat protection that automatically shuts off the appliance in the event of overheating. For example, due to a total or partial blockage of the vents. Multifunction: thermostat, 24-hour timer, weekly timer, window sensor with automatic shut-off.

LOGISTICS DATA

Packing type	Colour box
Pack length (mm)	140
Pack width (mm)	550
Pack height (mm)	210
Packed product weight (kg)	2.102
Inner length (cm)	57
Quantity in inner	1
Gross weight inner (kg)	13.400
ITF INNER	18003910114521
Quantity in master	6
How many pieces on 80x120 pallet (pz)	60
INTRASTAT Code	85162991
DEEE	0.58
ECOLOGIC SCALES 2025	MCHAE010000
Country of origin	CHINA

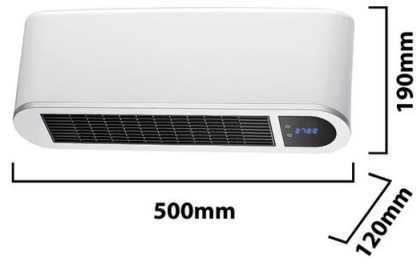

FUNZIONI
DISPLAY FUNCTIONS

