

10m



PACKING 	INNER 	MASTER
Shrink	5	10



TECHNICAL DATA

Power supply	220V AC
Power supply provided	YES
Type of power supply provided	POWER CABLE
Cable section	H07RN-F 3x1.5
Cable length (meters)	10
Switch	NO
Plug	Type E / F - 2 pin (EU Hybrid)
Main socket	French type 2P+T
Number of sockets	2
Uncoiled cable (W)	3680
Maximum load	3680W
IP Protection	IP44
Insulation class	I
Color	YELLOW
Material	PLASTIC-NEOPRENE
NF	YES
Warranty	2 YEARS
Width (mm)	300
Depth (mm)	190
Height (mm)	70
Net weight (Kg)	1.501

DESCRIPTION

10-meter IP44 extension cord with 2 2P+T sockets and Schuko E/F plug. Durable and flexible H07RN-F neoprene cable, ideal for gardens, workshops, or construction sites. EXTENDED 10 METER VERSION – For remote work or connections in large spaces, gardens and outdoor areas. DOUBLE 2P+T SOCKET WITH IP44 PROTECTION – Suitable for power tools, work appliances and small appliances. UNIVERSAL SCHUKO E/F PLUG – Compatible with French and German sockets, ensures safe and stable connections. PROFESSIONAL CABLE H07RN-F 3x1.5 – Made of neoprene, flexible and resistant to shock, humidity and chemicals.

LOGISTICS DATA

Packing type	Shrink
Pack length (mm)	190
Pack width (mm)	300
Pack height (mm)	70
Packed product weight (kg)	1.501
Inner width (cm)	31



PRO722-10F

DATA SHEET

Stak M/2xF French standard construction site extension cord, 10 meters. H07RN-F
3G1.5mm², NF, CE - IP44

LOGISTICS DATA

Inner length (cm)	28
Inner height (cm)	28
Quantity in inner	5
Gross weight inner (kg)	7.500
ITF INNER	18003910116884
Master length (cm)	40
Master width (cm)	31
Master height (cm)	29
Quantity in master	10
Master gross weight (kg)	15.600
ITF MASTER	28003910116881
How many pieces on 80x120 pallet (pz)	180
INTRASTAT Code	85444290
DEEE	0.08



3G
1,5mm²


3680W
max.

Cable
Néoprène
H07RN-F



CÂBLES EN CUIVRE ÉPAIS POUR UNE PARFAITE SÉCURITÉ

Velamp utilise des fils en vrai cuivre qui garantissent une bonne conductivité électrique et une excellente dispersion de la chaleur. La gaine en Néoprène est ultra résistante.

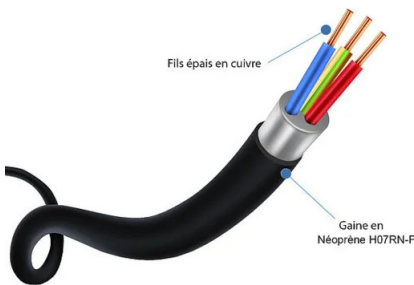

IP44

Pays compatibles:

Compatible countries:

