



PACKING	INNER	MASTER
/	pcs	pcs
Colour Box	6	24



TECHNICAL DATA



Power supply	SOLAR
Power supply provided	YES
Type of power supply provided	SOLAR PANEL
Battery type	18650
Stack technology	LITHIUM-ION
Rated voltage (V)	3,7
Battery capacity (mAh)	3000
Batteries provided	(INCLUDED)
Power battery (Wh)	11.1
Battery class	9
Battery/battery weight (kg)	0.084
Charging time (h)	8
Maximum autonomy (h)	24
Lighting source	SMD LED
Lighting power (W)	6
Lumen	800
Light colour	4000K
Scope (m)	8
Light beam	DIFFUSE
Beam angle (°)	140°
Detection angle (°)	120°
Detector operation time	20 SECONDS
Switch	YES
IP Protection	IP65
Color	BLACK
Country of origin	CHINA
Material	PLASTIC - PC
Standards	UN3481
Warranty	2 YEARS
Width (mm)	230
Depth (mm)	95
Height (mm)	45
Net weight (Kg)	0.582

DESCRIPTION

Solar LED wall light made of UV-resistant polycarbonate and ABS; contemporary and extremely refined design; IP65: resistant to shock and atmospheric agents; the electronics are particularly resistant to water. Operation: The lamp charges during the day using solar radiation. 2 modes of use: 1) The lamp turns on automatically at night and maintains 50% brightness for 5 hours, after which (or when the battery charge is less than 30%), the lamp switches to energy-saving mode: the lamp automatically turns on at 100% brightness when motion is detected within a distance of ≤ 6 meters, then turns off after 20 seconds of no motion. 2) Motion Sensor Mode: The lamp automatically turns on at night at 100% brightness when it detects motion within a distance of ≤ 6 meters, then switches to 5% brightness after 20 seconds of no motion. The lamp features latest-generation SMD LEDs with a high-performance diffuser: the light is uniform; 4000K light: neither too warm nor too cold. Equipped with a 2.8W monocrystalline solar panel and a 3000mAh Li-Ion battery, it guarantees battery life of up to 2-3 nights (depending on the charge received during the day), far exceeding market standards. It can be fixed using wall plugs (provided). Dimensions: 230mm x 97mm x 42mm; easy to attach using two dowels.

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	105
Pack width (mm)	235
Pack height (mm)	50
Packed product weight (kg)	0.644
Inner width (cm)	34
Inner length (cm)	32
Inner height (cm)	12
Quantity in inner	6
Gross weight inner (kg)	4.200
ITF INNER	18003910112053
Master length (cm)	53
Master width (cm)	34
Master height (cm)	28
Quantity in master	24
Master gross weight (kg)	17.000
ITF MASTER	28003910112050
How many pieces on 80x120 pallet (pz)	384
INTRASTAT Code	94055000
DEEE	0.11
ECOLOGIC SCALES 2025	MLUMI030000
Country of origin	CHINA

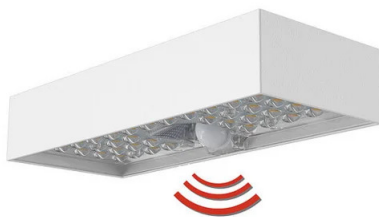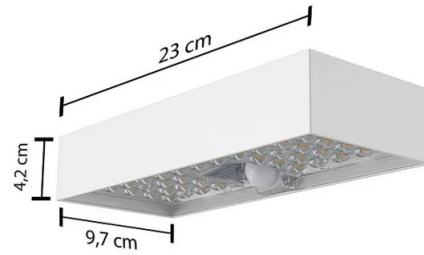

2 WORKING MODES

Sensor Mode

Continuous Light Mode

Solar Charging

Storing Solar energy during the day (even cloudy days)

Turn on automatically at night

