



PACKING	INNER	MASTER
/	pcs	pcs
Colour Box	6	24



TECHNICAL DATA




Power supply	SOLAR
Power supply provided	YES
Type of power supply provided	SOLAR PANEL
Batteries provided	(INCLUDED)
Battery type	18650
Battery capacity (mAh)	3000
Stack technology	LITHIUM-ION
Charging time (h)	8
Battery/battery weight (kg)	0.084
Maximum autonomy (h)	24
Lighting source	SMD LED
Lighting power (W)	6
Lumen	800
Light beam	DIFFUSE
Beam angle (°)	140°
Detection angle (°)	120°
Detector operation time	20 SECONDS
Scope (m)	8
Material	PLASTIC - PC
Color	WHITE
Switch	YES
IP Protection	IP65
Light colour	4000K
Rated voltage (V)	3,7
Warranty	2 YEARS
Width (mm)	230
Depth (mm)	95
Height (mm)	45
Net weight (Kg)	0.588

DESCRIPTION

LED solar wall lamp in anti-UV polycarbonate and ABS; contemporary and extremely refined design; impact and weather resistant; the electronic part is particularly resistant to water. Operation: the lamp is recharged during the day, thanks to the sun's rays. 2 modes of use: 1) The lamp turns on automatically at night and maintains a brightness of 50%, for 5 hours. After which (or when the battery charge is less than 30%), the lamp switches to energy saving mode: the lamp automatically switches on at 100% brightness when motion is detected at a distance ≤ 6 meters, then turns off after 20 seconds of no movement. 2) Motion sensor mode: the lamp will automatically turn on at night at 100% brightness when it detects motion at a distance of ≤ 6 meters, then switches to 5% brightness after 20 seconds of inactivity. The lamp is equipped with latest generation SMD LEDs with a high-performance diffuser: the light is homogeneous. 4000K light: neither too hot nor too cold. Equipped with a 2.8W monocrystalline solar panel and a 3000mAh Li-Ion battery, it guarantees an autonomy of up to 2/3 nights (based on the charge received during the day), well above the market standards. It can be fixed using dowels (supplied). Dimensions: 230mm x 97mm x 42mm; simple fixing with two pegs. the light is homogeneous. 4000K light: neither too hot nor too cold. Equipped with a 2.8W monocrystalline solar panel and a 3000mAh Li-Ion battery, it guarantees an autonomy of up to 2/3 nights (based on the charge received during the day), well above the market standards. It can be fixed using dowels (supplied). Dimensions: 230mm x 97mm x 42mm; simple fixing with two pegs. the light is homogeneous. 4000K light: neither too hot nor too cold. Equipped with a 2.8W monocrystalline solar panel and a 3000mAh Li-Ion battery, it guarantees an autonomy of up to 2/3 nights (based on the charge received during the day), well above the market standards. It can be fixed using dowels (supplied). Dimensions: 230mm x 97mm x 42mm; simple fixing with two pegs.

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	105
Pack width (mm)	235
Pack height (mm)	50
Packed product weight (kg)	17.100
Inner width (cm)	34
Inner length (cm)	32
Inner height (cm)	12
Quantity in inner	6
Gross weight inner (kg)	4.100
ITF INNER	18003910112060
Master length (cm)	53
Master width (cm)	34
Master height (cm)	28
Quantity in master	24
Master gross weight (kg)	17.100
ITF MASTER	28003910112067
How many pieces on 80x120 pallet (pz)	384
INTRASTAT Code	94055000
ECOLOGIC SCALES 2025	MLUMI030000
Country of origin	CHINA

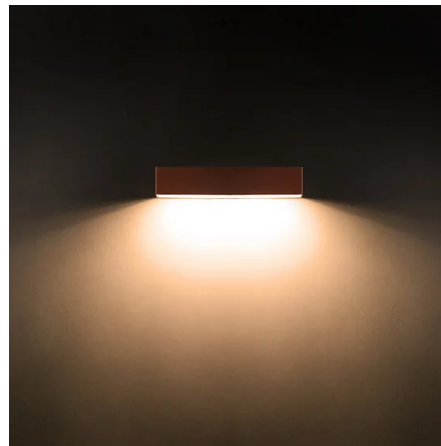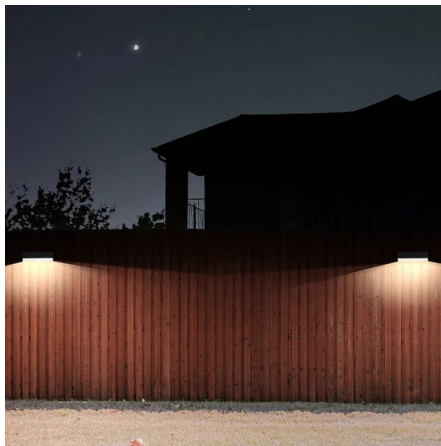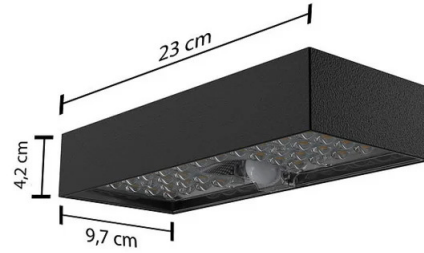

Solar Charging

