



| PACKING | INNER | MASTER |
|-------------------|----------|----------|
| / | pcs | pcs |
| Colour Box | 1 | 8 |



TECHNICAL DATA

| | |
|-------------------------------|--------------|
| Power supply | SOLAR |
| Type of power supply provided | SOLAR PANEL |
| Battery type | 18650 |
| Stack technology | LITHIUM-ION |
| Rated voltage (V) | 3,7 |
| Battery capacity (mAh) | 2000 |
| Batteries provided | (INCLUDED) |
| Battery/battery weight (kg) | 0.050 |
| Charging time (h) | 8 |
| Maximum autonomy (h) | 24 |
| LED quantity | 98 |
| Lighting source | SMD LED |
| Lighting power (W) | 5 |
| Lumen | 400 |
| Light colour | 4000K |
| Light beam | DIFFUSE |
| Beam angle (°) | 120° |
| Detection angle (°) | 120° |
| Detector operation time | 20 SECONDS |
| IP Protection | IP65 |
| Insulation class | III |
| Country of origin | CHINA |
| Material | PLASTIC - PC |
| Warranty | 2 YEARS |
| Width (mm) | 160 |
| Depth (mm) | 100 |
| Height (mm) | 700 |
| Net weight (Kg) | 1.213 |

DESCRIPTION




Solar LED floor lamp made of polycarbonate; contemporary and extremely refined design; shock and weather resistant; the electronics are particularly resistant to water. Equipped with a dual solar panel (front and back, 6W) to ensure maximum energy charging. 2000mAh Li-Ion battery; charges during the day and turns on automatically in the dark for 2 nights. Operation: The lamp charges during the day using solar radiation. 2 modes of use: 1) Sensor mode: The lamp turns on automatically at night. It turns on at full brightness (400 lm) if it detects motion within a distance of 7 meters, then switches to a lower brightness after 20 seconds without motion. 2) Continuous light mode: The lamp will automatically turn on at night and maintain 50% brightness. After 5 hours (or when the battery charge is less than 30%), the lamp will switch to sensor mode. The lamp features latest-generation SMD LEDs with a high-performance diffuser: the light is uniform; 4000K light: neither too warm nor too cold. Dimensions: 46.3 cm high and 16 cm in diameter. Two mounting options: with screws or with a stake (both supplied).

LOGISTICS DATA

| | |
|---------------------------------------|----------------|
| Packing type | Colour Box |
| Pack length (mm) | 110 |
| Pack width (mm) | 190 |
| Pack height (mm) | 730 |
| Packed product weight (kg) | 1.560 |
| Inner length (cm) | 76 |
| Inner height (cm) | 40 |
| Quantity in inner | 1 |
| Gross weight inner (kg) | 13.800 |
| ITF INNER | 18003910112091 |
| Quantity in master | 8 |
| How many pieces on 80x120 pallet (pz) | 72 |
| INTRASTAT Code | 94055000 |
| DEEE | 0.21 |
| ECOLOGIC SCALES 2025 | MLUMI030000 |
| Country of origin | CHINA |



DIMENSIONS:

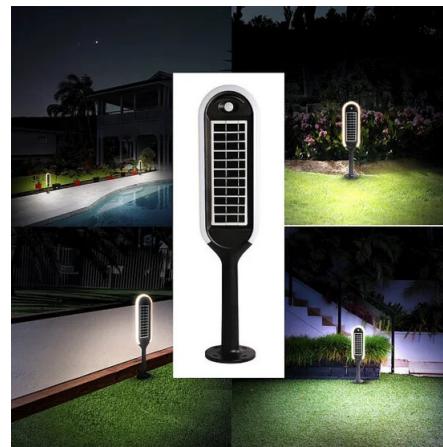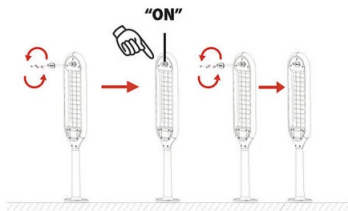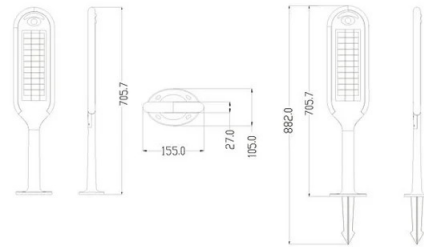


Solar Charging



2 INSTALLATION WAYS

HARD GROUND



SOFT GROUND

