



PACKING	INNER	MASTER
/	pcs	pcs
Colour Box	1	4



TECHNICAL DATA

Name	CRUISER XL
Power supply	SOLAR
Type of power supply provided	SOLAR PANEL
Battery type	32700
Stack technology	LiFePO4
Rated voltage (V)	9,6
Battery capacity (mAh)	12000
Batteries provided	(INCLUDED)
Power battery (Wh)	115.2
Battery class	9
Replaceable Battery	YES
Battery/battery weight (kg)	0.920
Charging time (h)	8
Maximum autonomy (h)	24
LED quantity	90
Lighting source	SMD LED
Lighting power (W)	40
Lumen	6000
Light colour	4000K
Light beam	DIFFUSE
Beam angle (°)	120°
Detection angle (°)	120°
Detector operation time	20 SECONDS
IP Protection	IP65
Country of origin	CHINA
Material	PLASTIC - PC
Standards	UN3481
Warranty	2 YEARS
Width (mm)	710
Depth (mm)	285
Height (mm)	70
Net weight (Kg)	5.282

DESCRIPTION


Ultra-Bright: The 40W solar street light is equipped with 90 SMD LEDs that provide super-bright illumination for an outdoor area of approximately 80m². Whether mounted on a pole or wall, this powerful outdoor solar light provides 6000 lumens. The large-capacity 12000mAh lithium battery ensures long battery life, even on sunless days. **Smart Charging Technology:** The built-in solar panel converts sunlight into electricity with high efficiency (21W monocrystalline). The latest-generation charging system allows the solar panel to charge even on cloudy or rainy days. Lighting guaranteed 365 days a year. **Motion Sensor:** The street light charges during the day and automatically turns on at night. **Operating Modes:** 1) **Constant Light Mode:** The light will automatically turn on at night and maintain a constant 60% brightness for 4 hours, then switch to motion sensor mode. 2) **Motion Sensor Mode:** The light will automatically turn on at 100% brightness when motion is detected within a radius of ≤ 12 meters, then dim to 30% brightness after 20 seconds without motion. **Versatile outdoor light:** The lamp is designed for outdoor use. It is therefore waterproof (IP65 certified), UV-resistant, and weatherproof (super-resistant polycarbonate). The street light operates between -15 and +50 degrees Celsius. It withstands extreme weather conditions such as lightning, rain, and snow. Perfect for gardens, patios, yards, garages, driveways, parking lots, and businesses, etc. Easy to install: This outdoor solar light is easy to install. No need to run electrical cables, dig trenches, or anything else... it's completely wireless. And it's also a great saving: 0 euros on your electricity bill! It can be mounted on a wall or pole (straight or curved), the recommended installation height is about 3-5 meters. It comes with a convenient remote control for controlling and programming it.

LOGISTICS DATA

Packing type	Colour Box
Pack length (mm)	330
Pack width (mm)	730
Pack height (mm)	95
Packed product weight (kg)	5.899
Inner length (cm)	75
Inner height (cm)	35
Quantity in inner	1
Gross weight inner (kg)	24.600
ITF INNER	18003910112107
Quantity in master	4
How many pieces on 80x120 pallet (pz)	36
INTRASTAT Code	94055000
DEEE	0.71
ECOLOGIC SCALES 2025	MLUMI040000
Country of origin	CHINA





DIMENSIONS:

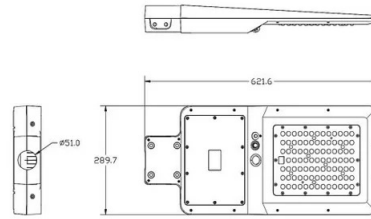

ADJUSTABLE



**PROGRAMMING BY
REMOTE CONTROL**

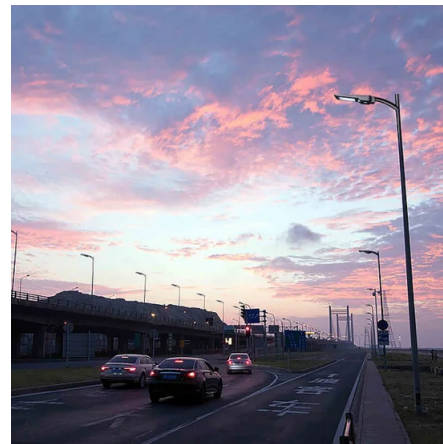

INSTALLATION HEIGHT



3 INSTALLATION WAYS

PRODUCT AND ACCESSORIES:

